



IT IS ALWAYS ABOUT MAKING A CHOICE & A CHOICE THAT LOOKS THE BEST.

600X 1200MM



# IT'S ALL ABOUT US

Avalta is a Group Venture by Avalta Granito which is renowned brands of the ceramic industry, bringing together the best of expertise and experience of more than six years, Avalta aims to revolutionize the industry by introducing never-before seen tiles that are sure to raise the bar of grandeur a notch higher.

Exclusivity in design and exquisite finishes defines the Avalta as Best products offerings. Use of quality certified raw materials and innovative - modern technology, Tiles produces in Avalta are the best blend of stylish designs and productive long lasting strength. With the newfangled ideas, we assure and able to create consolidation of Beauty, Style & Quality in Vitrified Tiles which will drive you to the luxuries way...

#### MISSION

Willingness towards the enhancement of life style and passionately strive to delight every customer of AVALTA by providing innovative and quality products and services as ongoing basis and to become a most sought after brand.

#### **VISION**

Avalta Granito Pvt Ltd is committed to providing technologically-advanced, aesthetically designed, high-strength, premium quality vitrified tiles that satisfy commercial as well residential customer needs in domestic and international markets.










Available in various materials, including ceramic and porcelain, Flamingo series tiles are ideal for creating statement walls, backsplashes, or accent floors.

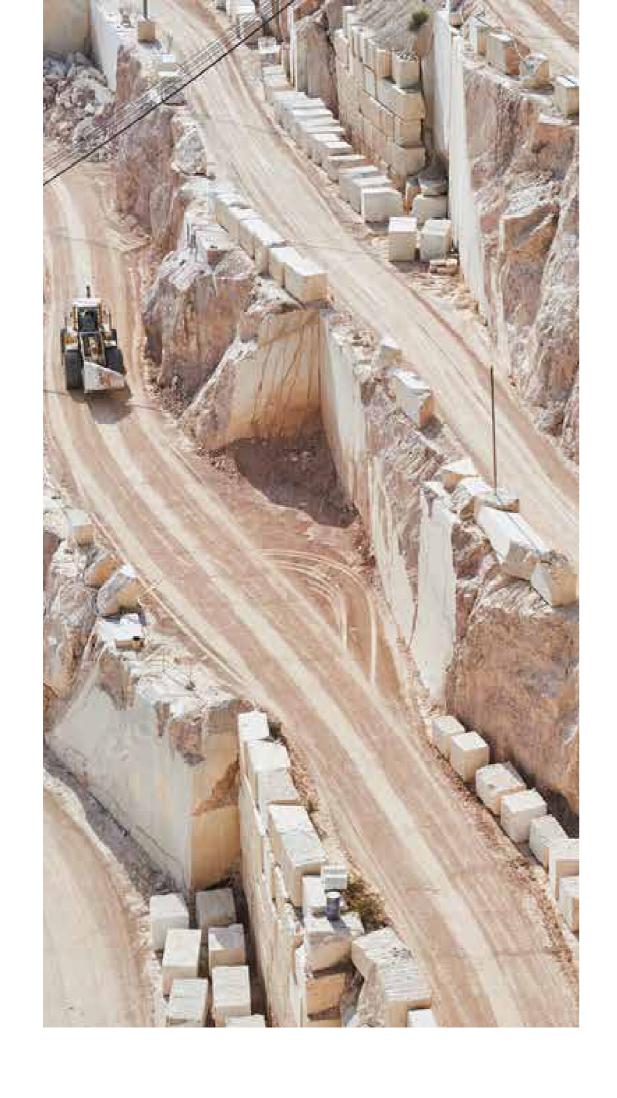




# 600X1200MM

Flamingo Series Tiles Are A Vibrant And Stylish Collection Known For Their Bold Colors, Unique Patterns, And Eye-catching Designs. Inspired By The Elegance And Beauty Of Flamingos, These Tiles Often Feature A Blend Of Vivid Hues And Intricate Motifs That Add A Lively And Playful Touch To Any Space.







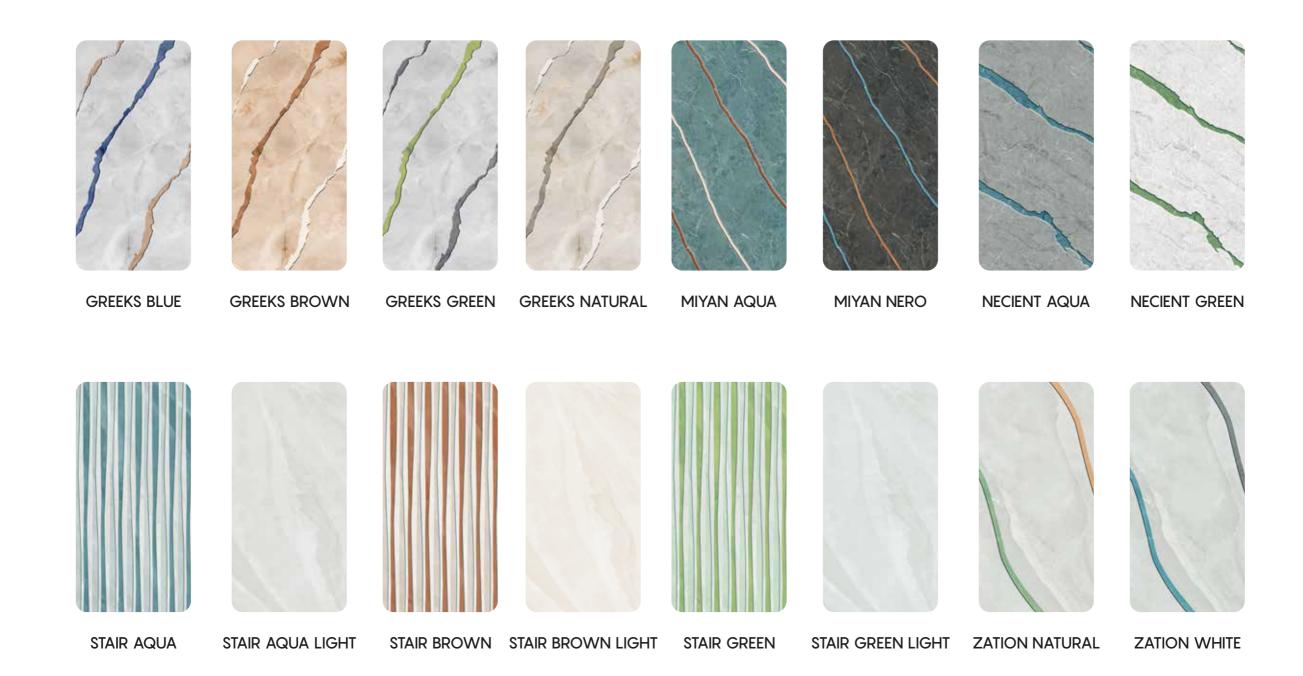








#### **GREEKS** BLUE

FINISH GLOSSY

RANDOM 05



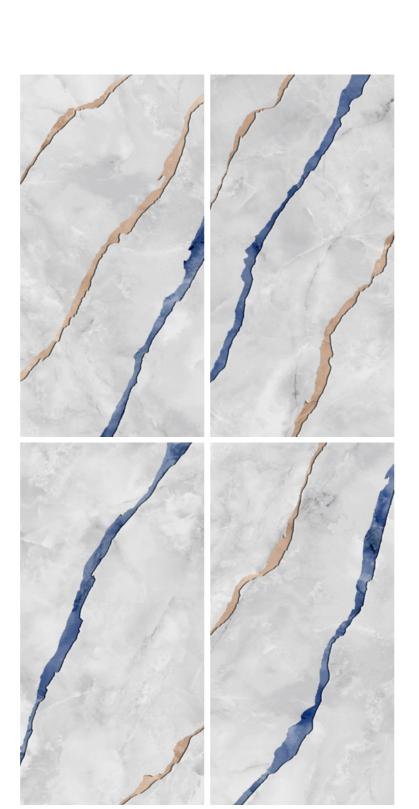









#### **GREEKS BROWN**

FINISH GLOSSY

RANDOM 05














#### **GREEKS GREEN**

FINISH GLOSSY

RANDOM 05



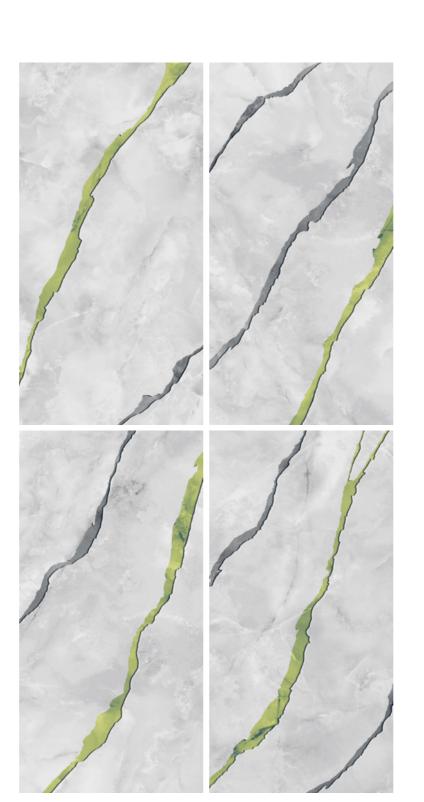









#### **GREEKS NATURAL**

FINISH GLOSSY

RANDOM 05














# **MIYAN** AQUA

FINISH RANDOM **GLOSSY** 03



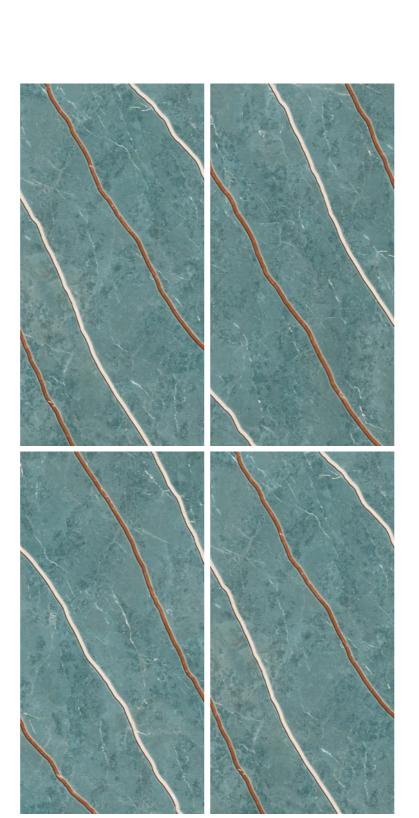












#### **MIYAN NERO**

FINISH RANDOM **GLOSSY** 03

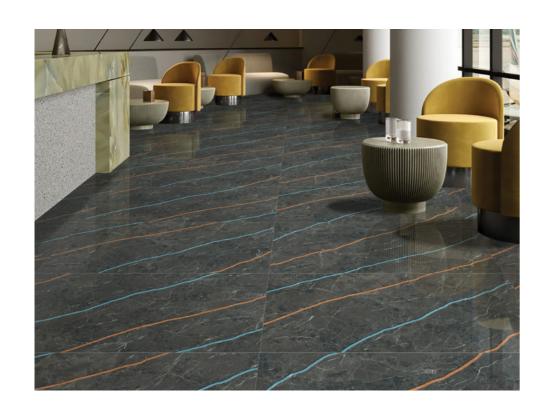

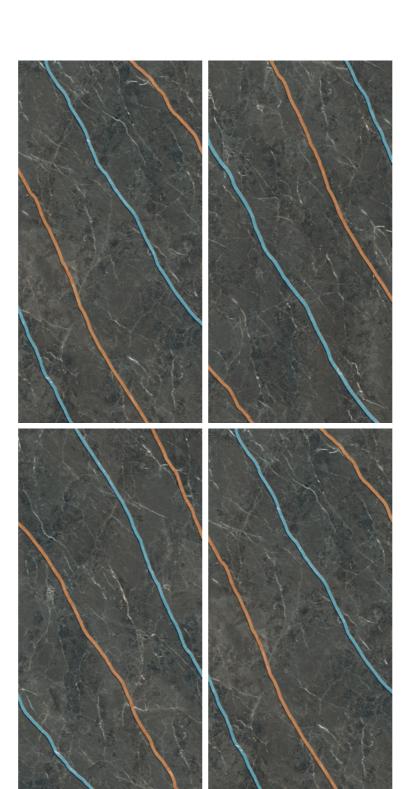

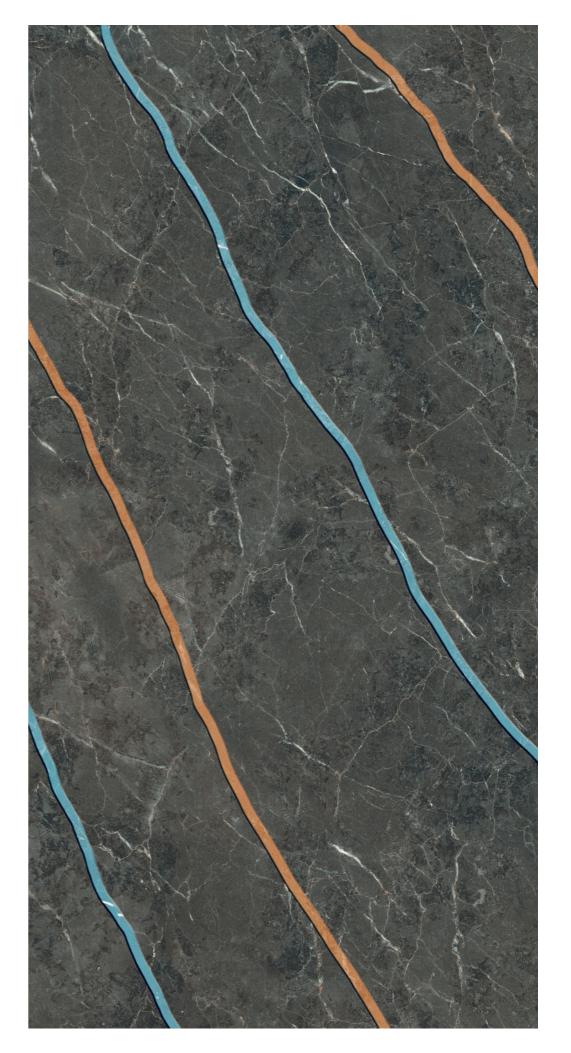









# **NECIENT** AQUA

FINISH GLOSSY

RANDOM 05



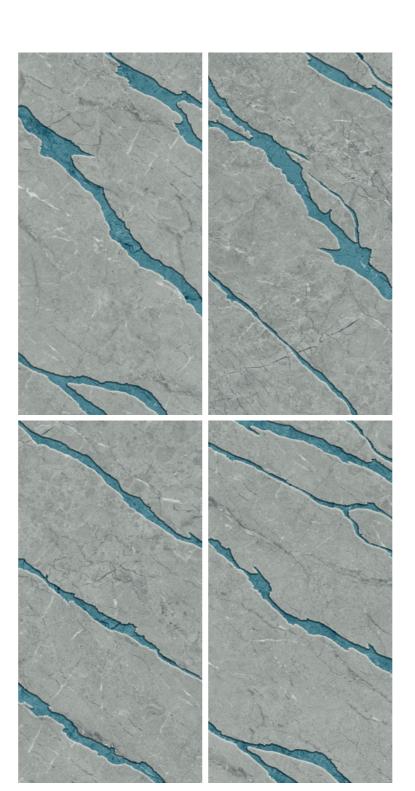

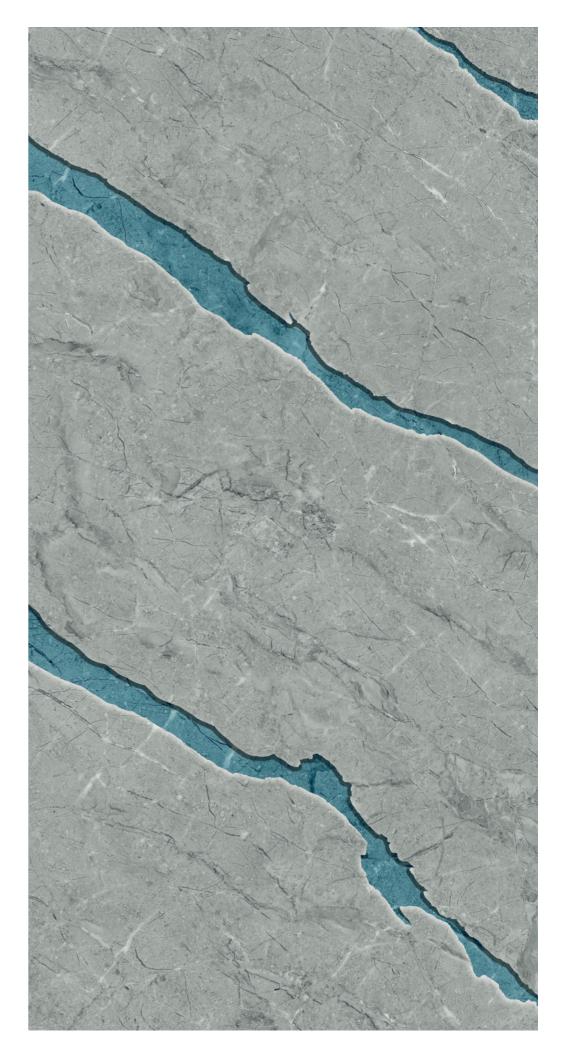









### **NECIENT GREEN**

FINISH GLOSSY

RANDOM 05



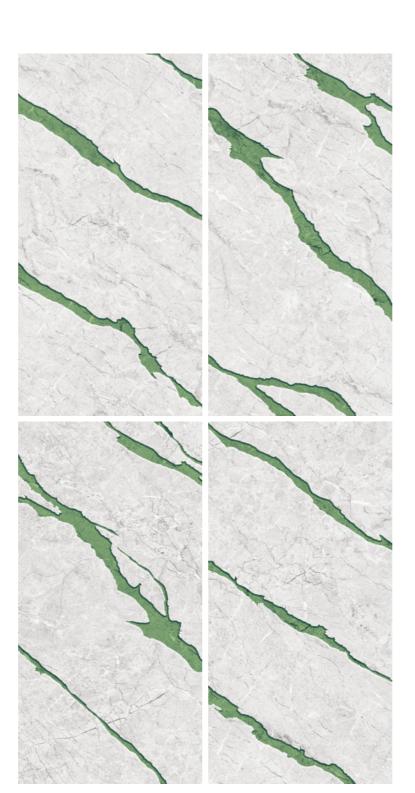

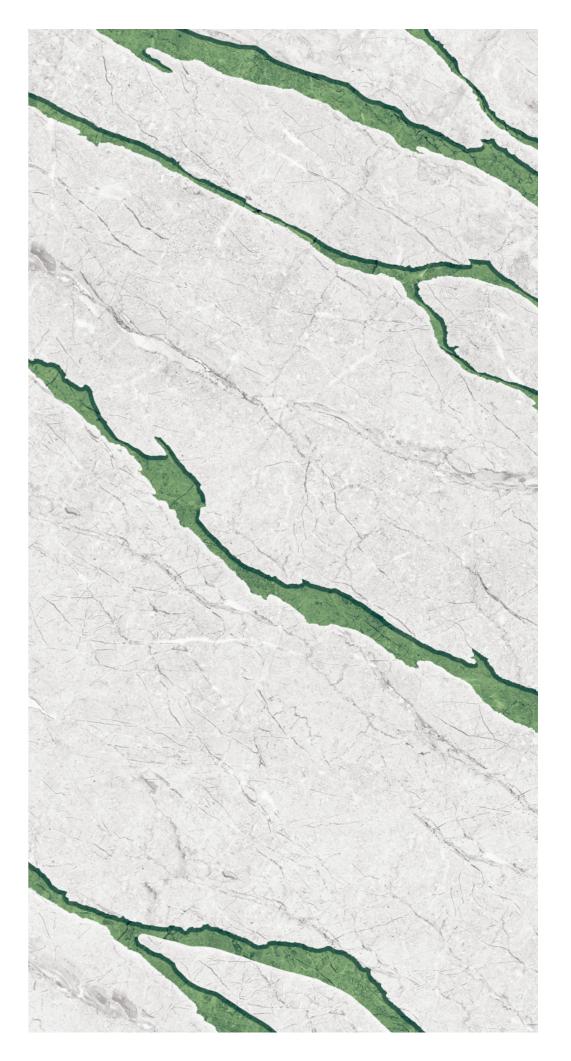









FINISH GLOSSY
















FINISH GLOSSY





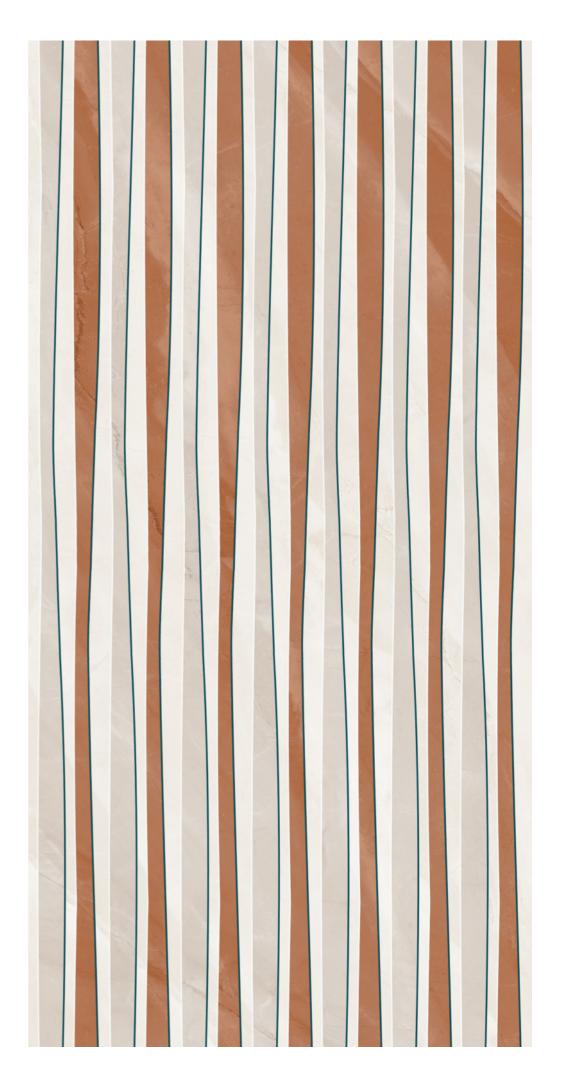









FINISH GLOSSY













#### **ZATION NATURAL**

FINISH GLOSSY

RANDOM 04














### **ZATION WHITE**

FINISH GLOSSY

RANDOM **04** 

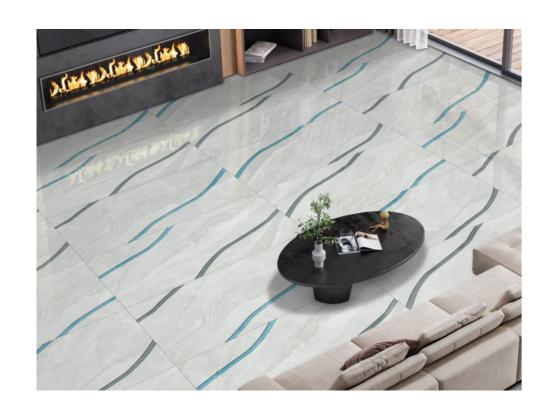







#### **Technical Specifications.**

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP Bla	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF GVT / PGVT	TEST METHOD
REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color dierence	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PRO	PERTIES	'	'	
Modulus Of Rupture	Min. 35 N/mm²	Min. 40 N/mm²	Min. 40 N/mm <sup>2</sup>	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PRO	PERTIES	,	<u>'</u>	
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101
THERMO HYDROMETRIC PR	OPERTIES	<u>'</u>	<u>'</u>	
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 <sup>-6</sup>	Max. 6.5x10 <sup>-6</sup>	Max. 6.5 x 10 <sup>-6</sup>	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES	'	'	'	
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES	'	'	<u>'</u>	
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given o by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15

#### **Packing Details.**

SR. NO.	PRODUCT	NOMINAL SIZE	TILES PER BOX	COVERAGE AREA
1	VITRIFIED TILES	600 x 1200 mm	2	1.44 Sq. Mtr.

Note: •Colour Shown are as accurate as the limitations of the printing process will allow. •Prospective customers are advised to inspect a sample of the tile before ordering. •Every effort has been made to ensure the accuracy of the information given. •However, the company reserve the right to change the specifications without prior notice. •Sometime variations in shade or size being inherent to ceramic industry may occur. •Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed

\_\_\_\_\_\_





#### **AVALTA GRANITO PVT. LTD.**

Customer Care - +91 7211 111 591 Survey No 159, At Ratavirda, Sartanpar Road, Wankaner, Morbi, Gujarat - 363621, India.